


SV




TYP	ABMESSUNGEN mm.				BEL. kg.		GEWICHT (gr)	CODE
	A	B	C	D	MIN	MAX		
000	40	23	M-8	48	20	80	89	143001
00	60	28	M-10	81	60	120	235	143002
0	70	32	M-12	89	90	160	350	143003
1	85	32	M-12	89	130	350	456	143004
2	100	40	M-14	109	270	600	702	143005
3	120	37	M-16	116	450	900	954	143006
4	140	55	M-16	116	700	1.200	1.513	143007
5	160	60	M-16	116	1100	1.750	1.865	143008
6	180	70	M-24	138	1500	2.500	3.034	143009
7	210	75	M-24	138	2100	3.750	4.248	143010

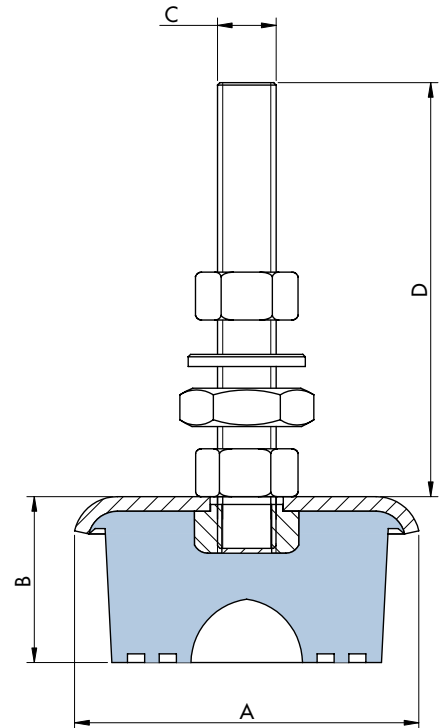

MECANOCAUCHO® TYP JT

ANWENDUNGEN

Dämpfer für Maschinenfüße.




HÄRTEBEREICH	BELASTUNG Kg.	CODE	GEWICHT (gr)
50	25-40	144001	53
75	75-100	144002	53



MECANOCAUCHO® TYP SX

ANWENDUNGEN

Dämpfer für Maschinenfüße.



HÄRTEBEREICH	BELASTUNG Kg.	CODE	GEWICHT (gr)
50	10-25	145001	25