



Vibrabsorber + Sylomer

TYP	A	B	C	D	E	F	CODE
4 AMC 600+Sylomer®	200	136	M - 16	150	12	170	20671
4 AMC 800+Sylomer®	200	136	M - 16	150	12	170	20672
4 AMC 1000+Sylomer®	200	136	M - 16	150	12	170	20673
4 AMC 1400+Sylomer®	200	136	M - 16	150	12	170	20674
4 AMC 2000+Sylomer®	250	136	M - 20	200	14	210	20675
4 AMC 3000+Sylomer®	250	136	M - 20	200	14	210	20676

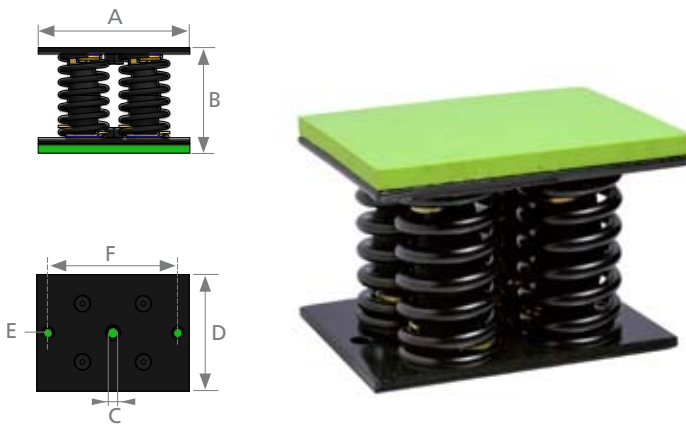


Vibrabsorber


TYP	A	B	C	D	E	F	CODE
4 AMC 600	200	124	M - 16	150	12	170	20601
4 AMC 800	200	124	M - 16	150	12	170	20611
4 AMC 1000	200	124	M - 16	150	12	170	20621
4 AMC 1400	200	124	M - 16	150	12	170	20631
4 AMC 2000	250	124	M - 20	200	14	210	20641
4 AMC 3000	250	124	M - 20	200	14	210	20651

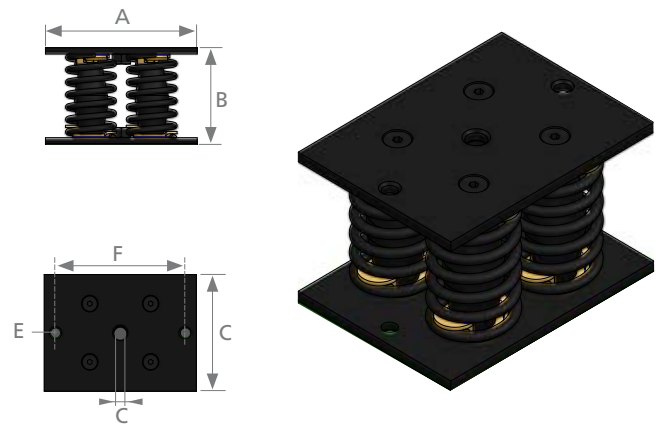

AMC EIGENFREQUENZEN
MECANOCAUCHO TYP 4 AMC

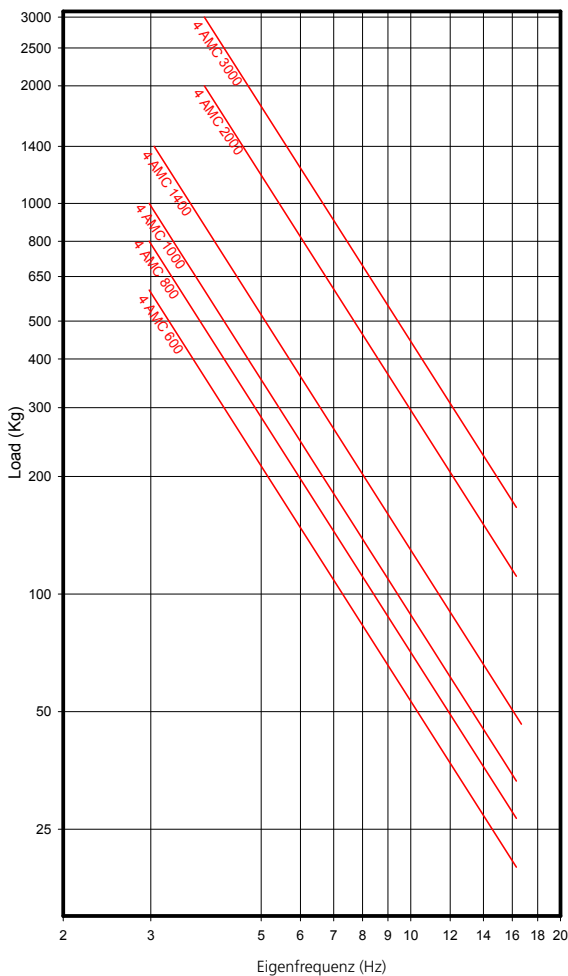

AMC BELASTUNGSDEFORMATION
MECANOCAUCHO TYP 4 AMC

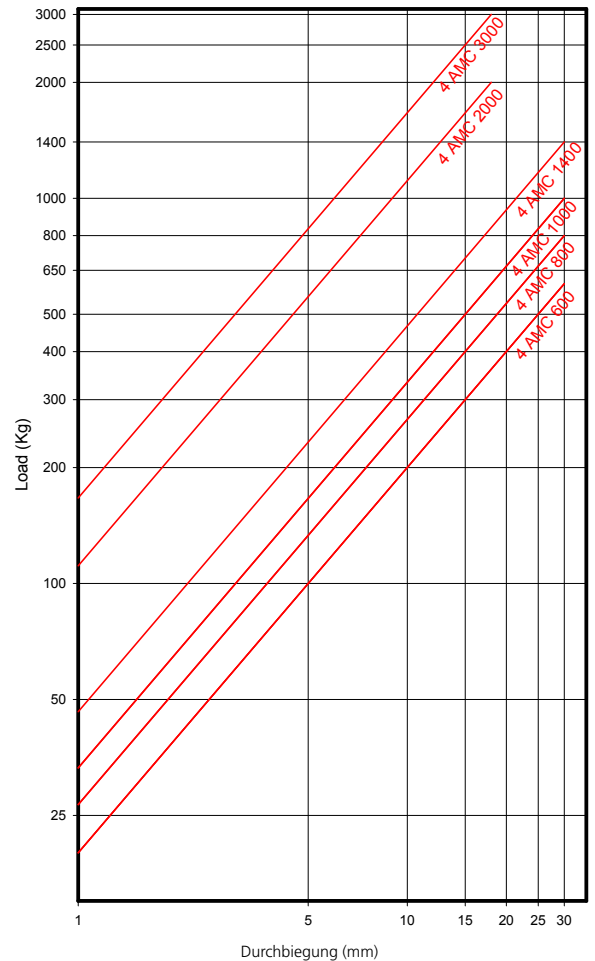

Um die Vorteile von Sylomer im System vibrabsorber® kennen zu lernen, siehe Seiten 14, 15, 16