


## SPECIFICATIONS

# AGLO PAI

20mm

40mm

Aluminium facing with fiberglass support and bound polyurethane foam with a density of 150 Kg/m<sup>3</sup>.

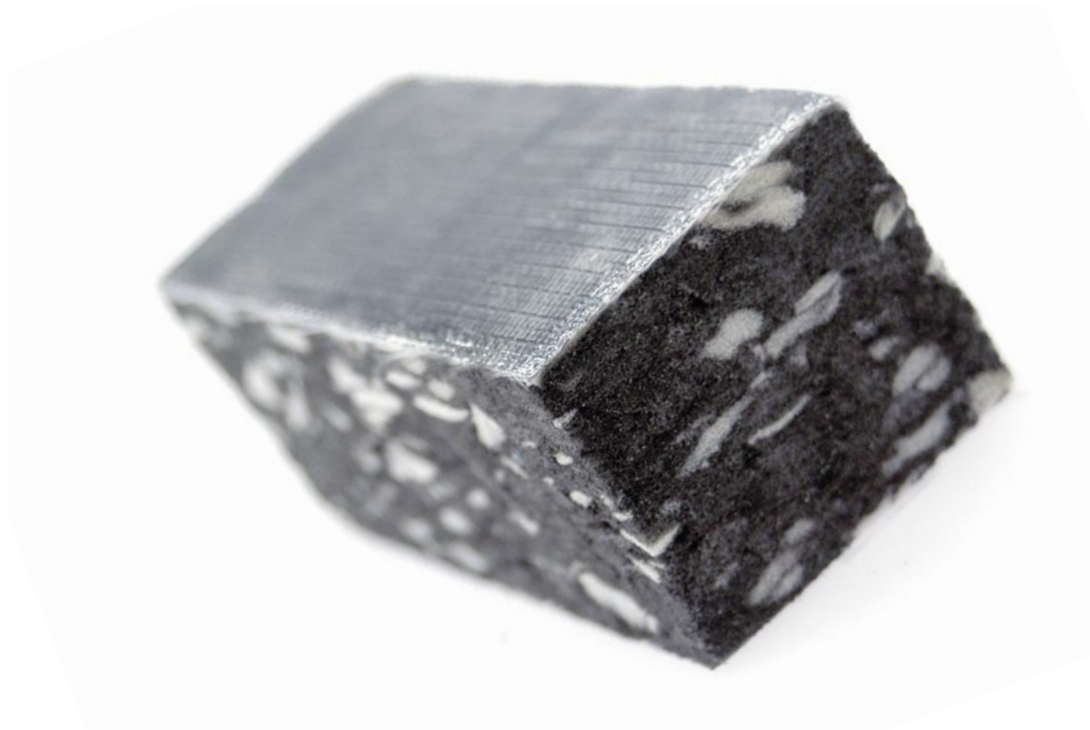

## Overall air-borne noise isolation use

Measurements according to UNE-EN ISO 140-3 standard (December 1995) Acoustic Isolation of Construction Materials in Laboratory Measurements.  
Corresponds completely with ISO 140-3(1995) standard.  
Cancels and substitutes UNE 74-040/3 (1984) standard.  
Calculations according to NBCEA88.

DESCRIPTION	R' (dB)
AGLO PAI-20 ON 2mm SHEET	26
AGLO PAI-40 ON 2mm SHEET	24

## Composition

Aluminium facing with fiberglass support and bound polyurethane foam with a density of 150 Kg/m<sup>3</sup>.

## Applications

Thermal insulation, M-1 class fire-resistant, good resistance to hydrocarbon damage and not very good acoustic absorber but good isolator.

## Thicknesses

20mm 40mm

## Formats


■ 2000x1000mm Sheets.

● Consult for roll manufacturing.

DESCRIP.	FORMAT	SELF-ADHESIVE	REF.
AGLO PAI 150/20	■	-	28101
AGLO PAI + AUTO 150/20	■	Y	28308
AGLO PAI 150/40	■	-	28102
AGLO PAI + AUTO 150/40	■	Y	28309

Transmission Loss (dB)

AGLO PAI

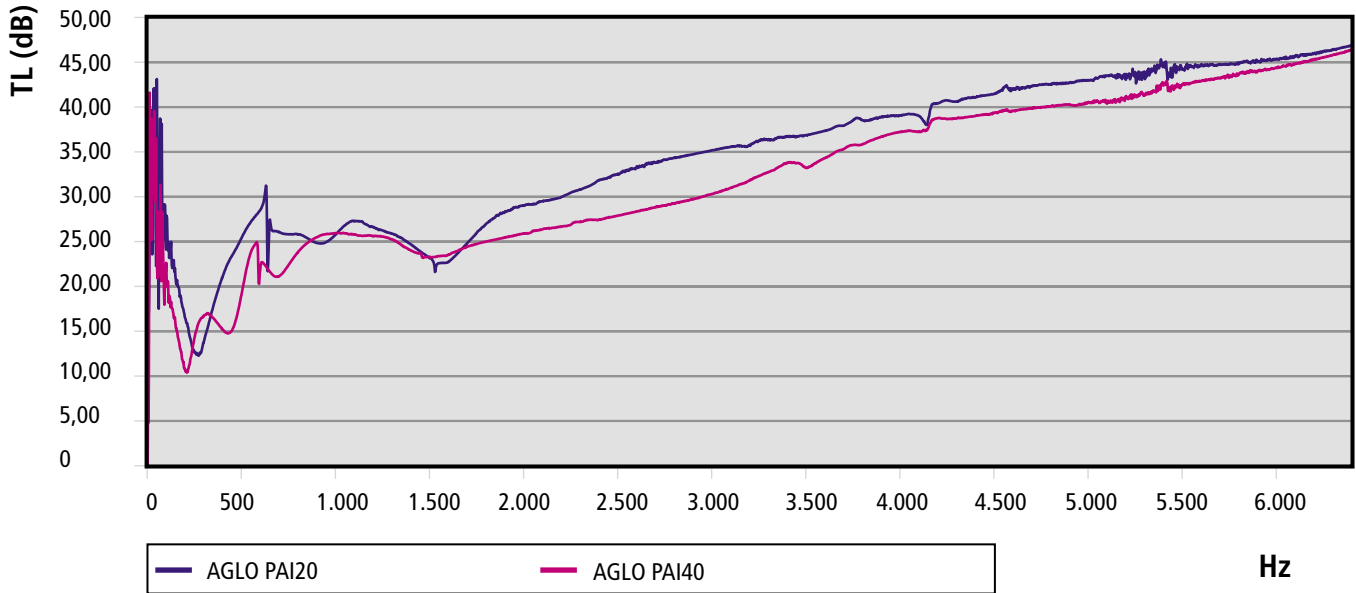

Absorption coefficient

AGLO PAI

