

SPECIFICATIONS

FD

15mm

25mm

Beige perforated PVC facing and M-1 class fire-resistant absorbing polyurethane foam.



Overall air-borne noise isolation use

Measurements according to UNE-EN ISO 140-3 standard (December 1995) Acoustic Isolation of Construction Materials in Laboratory Measurements.
Corresponds completely with ISO 140-3(1995) standard.
Cancels and substitutes UNE 74-040/3 (1984) standard.
Calculations according to NBECA88.

DESCRIPTION	R' (dB)
FD-15 ON 2mm SHEET	13
FD-25 ON 2mm SHEET	11

Composition

Beige perforated PVC facing and M-1 class fire-resistant absorbing polyurethane foam.

Applications

Lining interior of soundproof cabins or vehicles, good absorption and absorbent with M-1 class fire-resistant behaviour.

Thicknesses

15mm 25mm

Formats


1200x1000mm Sheets.
15mm thick, 8 Sheets per box.
25mm thick, 5 Sheets per box.

● Consult for roll manufacturing possibilities.

DESCRIP.	FORMAT	SELF-ADHESIVE	REF.
FD-15 sheet	■	-	26231
FD-15 A sheet	■	Y	26233
FD-25 sheet	■	-	26232
FD-25 A sheet	■	Y	26234

Transmission Loss (dB)

FD

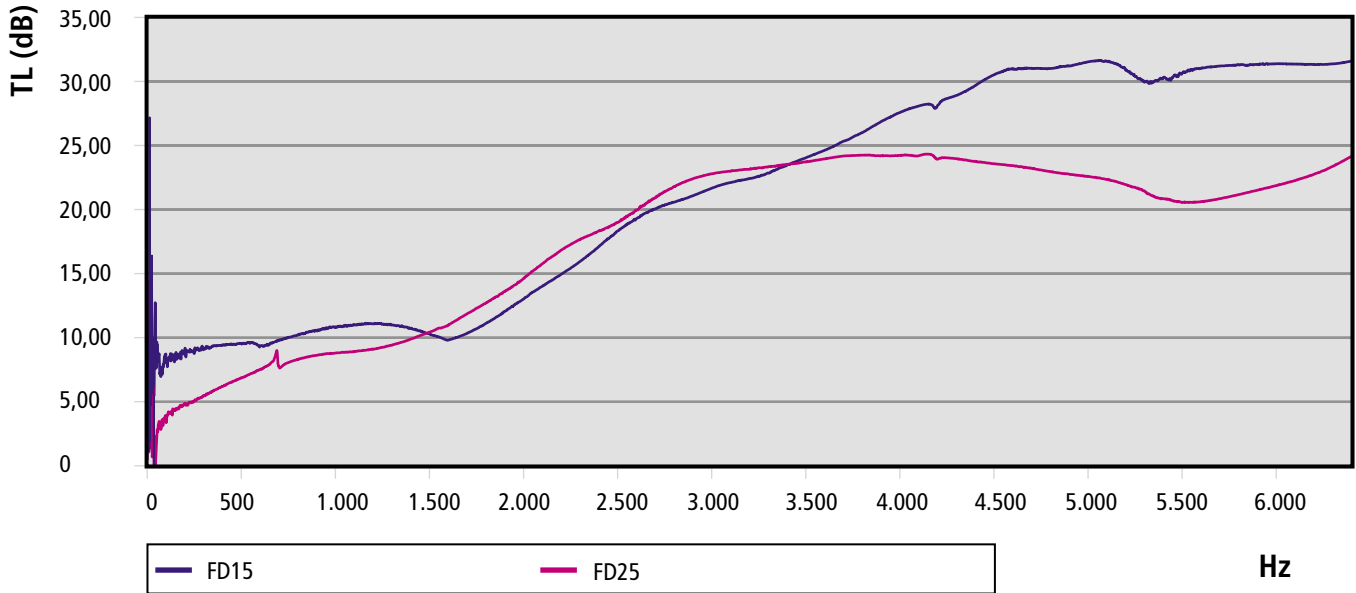

Absorption coefficient

FD

