

SPECIFICATIONS

PF BLACK

15mm

25mm

40mm

Black unwoven fabric and absorbing polyurethane foam.



Overall air-borne noise isolation use

Measurements according to UNE-EN ISO 140-3 standard (December 1995) Acoustic Isolation of Construction Materials in Laboratory Measurements.
Corresponds completely with ISO 140-3(1995) standard.
Cancels and substitutes UNE 74-040/3 (1984) standard.
Calculations according to NBCEA88.

DESCRIPTION	R' (dB)
PF-15 ON 2mm SHEET	11
PF-25 ON 2mm SHEET	12
PF-40 ON 2mm SHEET	11

Composition

Black unwoven fabric and absorbing polyurethane foam.

Applications

Lining interior of soundproof cabins and vehicles, good absorption.

Thicknesses

15mm 25mm 40mm

Formats


1200x1000mm Sheets.
15mm thick, 8 Sheets per box.
25mm thick, 5 Sheets per box.
40mm thick, 3 Sheets per box.

● 1500mm wide x approx. 20m long Rolls.

DESCRIP.	FORMAT	SELF-ADHESIVE	REF.
PF-15 roll	●	-	26160
PF-15 A roll	●	Y	26163
PF-25 roll	●	-	26161
PF-25 A roll	●	Y	26164
PF-40 roll	●	-	26162
PF-40 A roll	●	Y	26165

Transmission Loss (dB)

PF BLACK

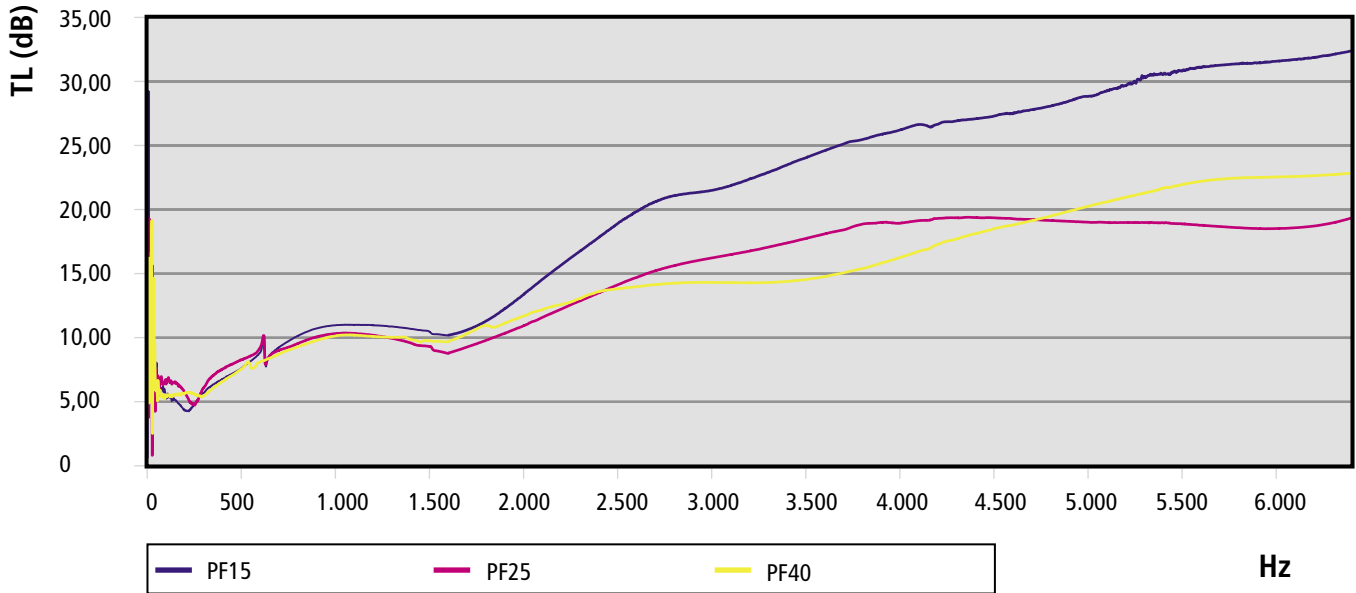

Absorption coefficient

PF BLACK

