

SPECIFICATIONS

PS WHITE

15mm

25mm

40mm

White PU film and absorbing polyurethane foam.



Overall air-borne noise isolation use

Measurements according to UNE-EN ISO 140-3 standard (December 1995) Acoustic Isolation of Construction Materials in Laboratory Measurements.
Corresponds completely with ISO 140-3(1995) standard.
Cancels and substitutes UNE 74-040/3 (1984) standard.
Calculations according to NBCEA88.

DESCRIPTION	R' (dB)
PS-15 ON 2mm SHEET	12
PS-25 ON 2mm SHEET	12
PS-40 ON 2mm SHEET	17

Composition

White PU film and absorbing polyurethane foam.

Applications

Interior lining of soundproof cabins or vehicles where the danger of hydrocarbons or water coming in contact with the absorbent material exists.

Thicknesses

15mm 25mm 40mm

Formats


1200x1000mm Sheets.
15mm thick, 8 Sheets per box.
25mm thick, 5 Sheets per box.
40mm thick, 3 Sheets per box.

● 1500mm wide x approx. 20m long Rolls.

DESCRIP.	FORMAT	SELF-ADHESIVE	REF.
PS-15 sheet	■	-	26002
PS-15 A sheet	■	Y	26092
PS-15 roll	●	-	26058
PS-15 A roll	●	Y	26095
PS-25 sheet	■	-	26005
PS-25 A sheet	■	Y	26093
PS-25 roll	●	-	26059
PS-25 A roll	●	Y	26096
PS-40 sheet	■	-	26008
PS-40 A sheet	■	Y	26094
PS-40 roll	●	-	26060
PS-40 A roll	●	Y	26097

Transmission Loss (dB)

PS WHITE

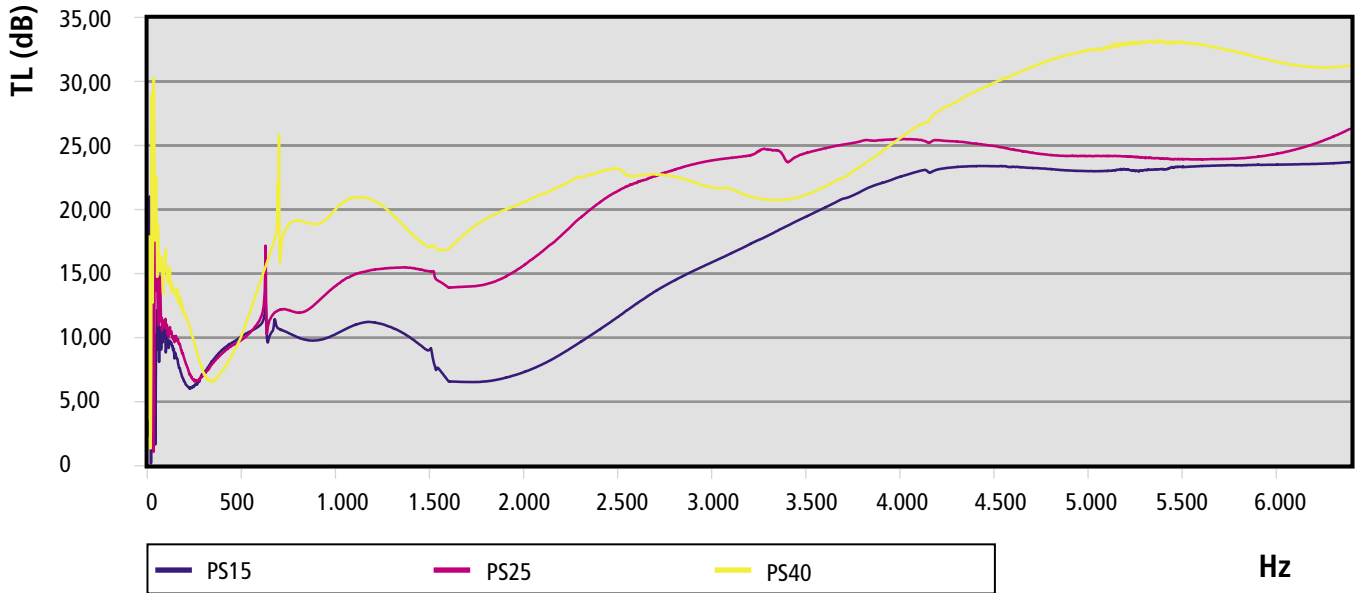

Absorption coefficient

PS WHITE

