
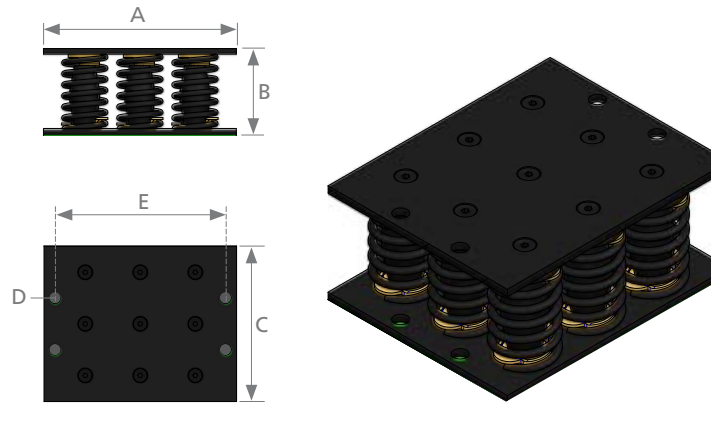


Vibrabsorber + Sylomer


TIPO	A	B	C	D	E	F	CÓDIGO
9 AMC 1350+Sylomer®	280	136	226	16	248	0	20971
9 AMC 1800+Sylomer®	280	136	226	16	248	0	20972
9 AMC 2250+Sylomer®	280	136	226	16	248	0	20973
9 AMC 3150+Sylomer®	280	136	226	16	248	0	20974
9 AMC 4500+Sylomer®	350	136	300	18	310	0	20975
9 AMC 6750+Sylomer®	350	136	300	18	310	0	20976

Vibrabsorber


TIPO	A	B	C	D	E	F	CÓDIGO
9 AMC 1.350	280	124	226	16	248	0	20901
9 AMC 1.800	280	124	226	16	248	0	20911
9 AMC 2.250	280	124	226	16	248	0	20921
9 AMC 3.150	280	124	226 <td 16	248	0	20931	
9 AMC 4.500	350	124	300	18	310	0	20941
9 AMC 6.750	350	124	300	18	310	0	20951

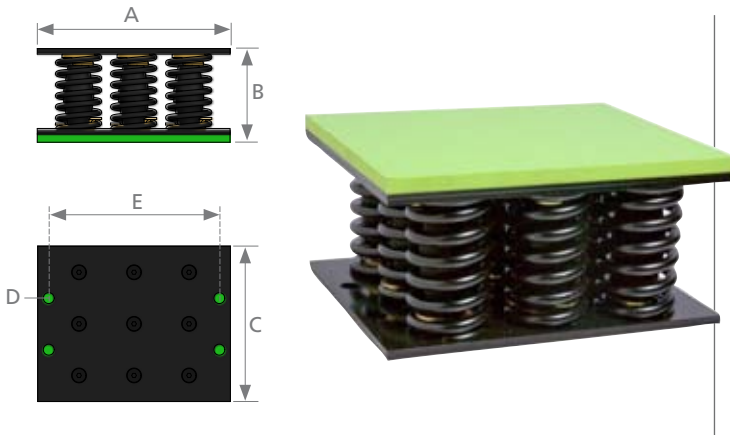

AMC FRECUENCIAS PROPIAS
MECANOCAUCHO® Tipo 9 AMC

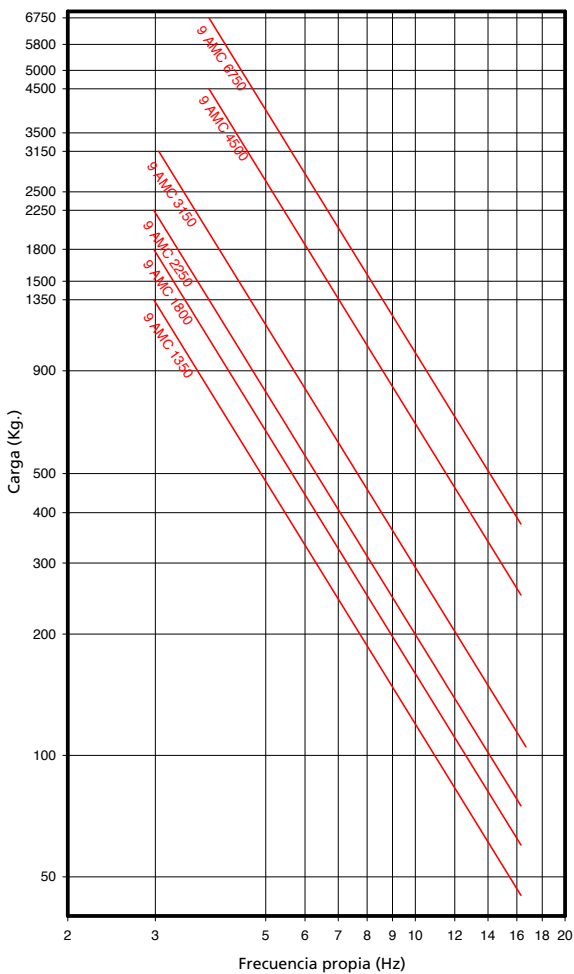

AMC CARGA DEFORMACION
MECANOCAUCHO® Tipo 9 AMC

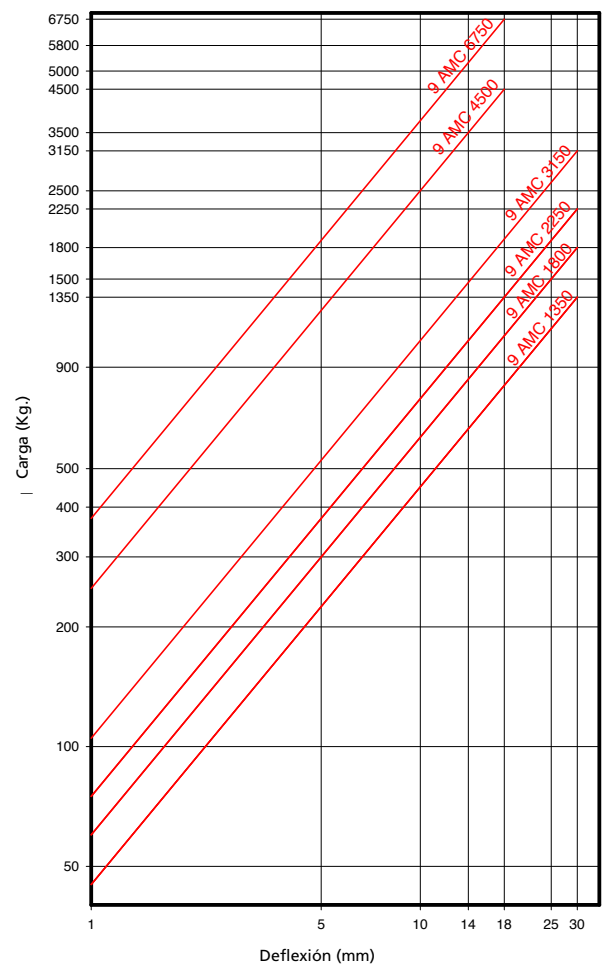

Para conocer las ventajas del Sylomer en el sistema vibrabsorber® vaya a la paginas 14,15,16