
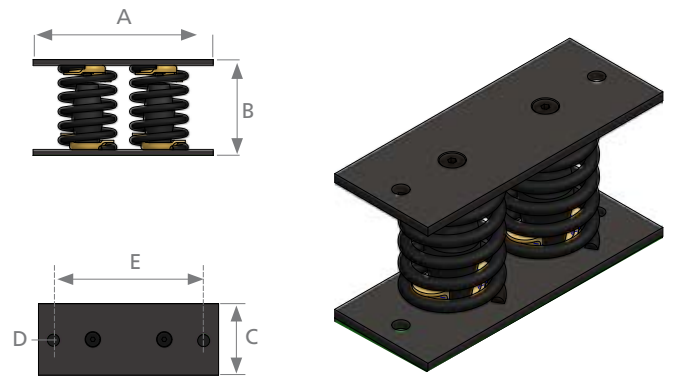


## Vibrabsorber + Sylomer


TIPO	A	B	C	D	E	F	CODICE
2 AMC 300+Sylomer®	200	136	75	12	170	0	20471
2 AMC 400+Sylomer®	200	136	75	12	170	0	20472
2 AMC 500+Sylomer®	200	136	75	12	170	0	20473
2 AMC 700+Sylomer®	200	136	75	12	170	0	20474
2 AMC 1000+Sylomer®	250	136	100	14	210	0	20475
2 AMC 1500+Sylomer®	250	136	100	14	210	0	20476

## Vibrabsorber


TIPO	A	B	C	D	E	F	CODICE
2 AMC 300	200	124	75	12	170	0	20401
2 AMC 400	200	124	75	12	170	0	20411
2 AMC 500	200	124	75	12	170	0	20421
2 AMC 700	200	124	75	12	170	0	20431
2 AMC 1.000	250	124	100	14	210	0	20441
2 AMC 1.500	250	124	100	14	210	0	20451

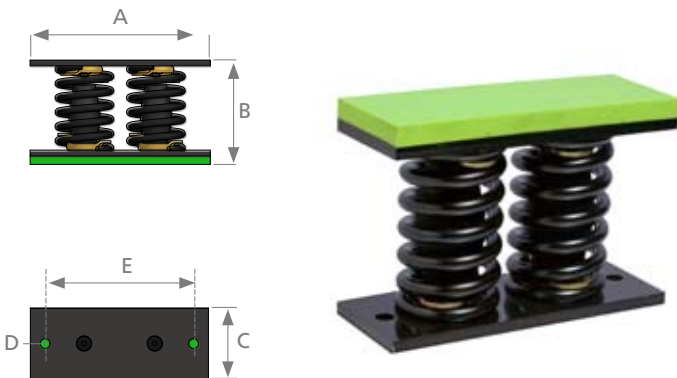

AMC FREQUENZE PROPRIE  
MECANOCAUCHO® Tipo 2 AMC

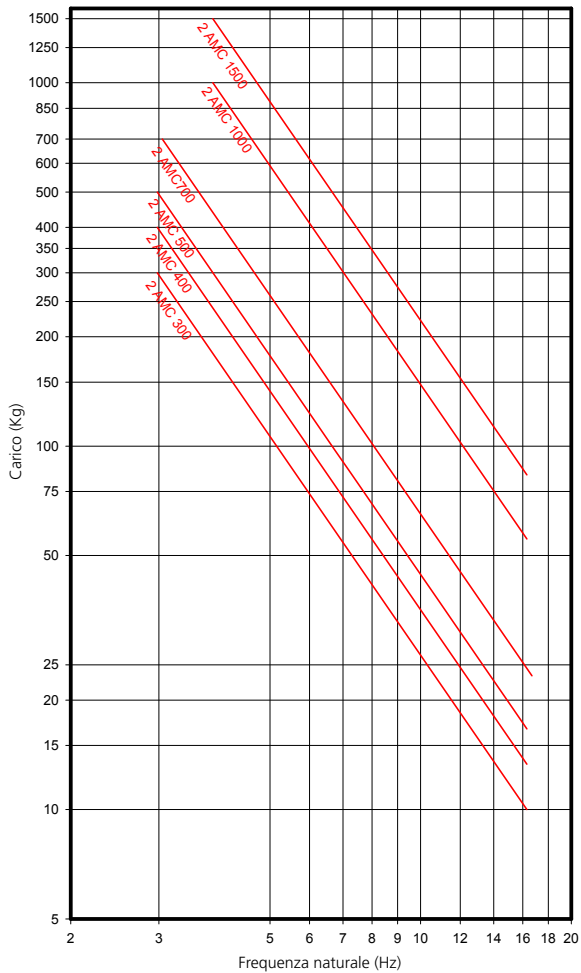

AMC CARICO DEFORMAZIONE  
MECANOCAUCHO® Tipo 2 AMC

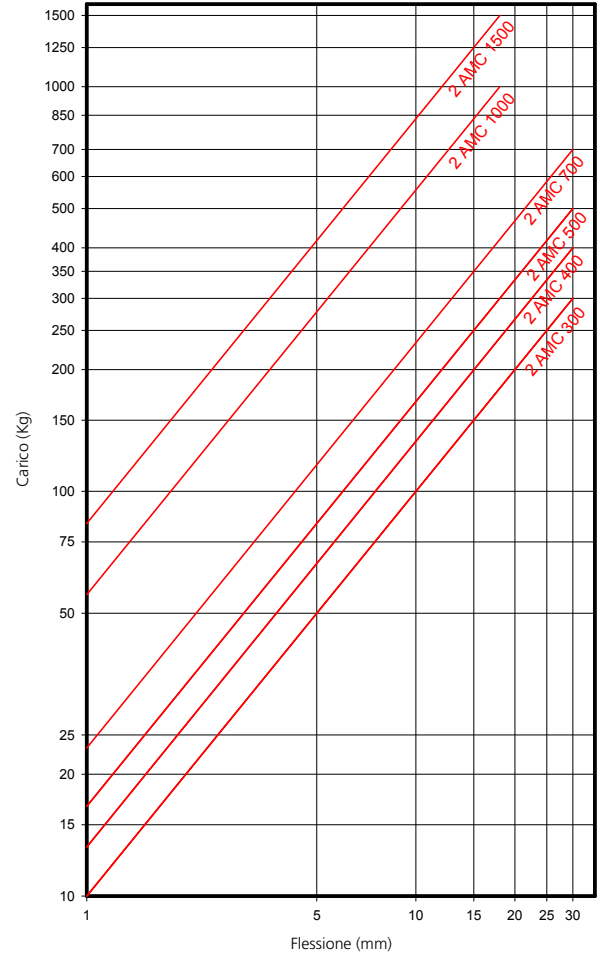

Per conoscere i vantaggi del Sylomer nei sistemi vibrabsorber®, consultare le pagine 14,15,16