
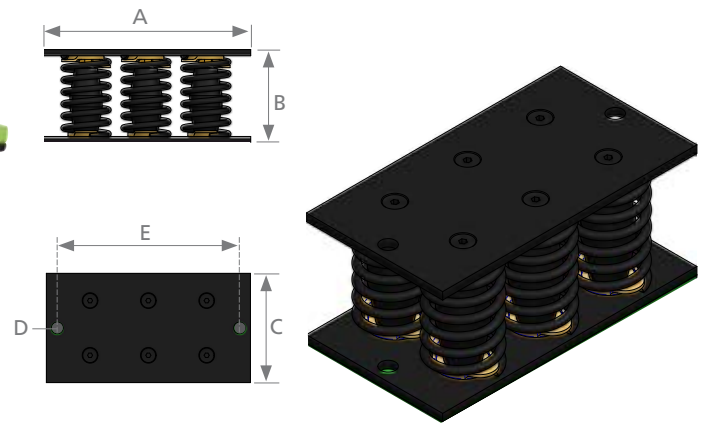


## Vibrabsorber + Sylomer


TIPO	A	B	C	D	E	F	CODICE
6 AMC 900+Sylomer®	280	136	150	16	248	0	20871
6 AMC 1200+Sylomer®	280	136	150	16	248	0	20872
6 AMC 1500+Sylomer®	280	136	150	16	248	0	20873
6 AMC 2100+Sylomer®	280	136	150	16	248	0	20874
6 AMC 3000+Sylomer®	350	136	200	18	300	0	20875
6 AMC 4500+Sylomer®	350	136	200	18	300	0	20876

## Vibrabsorber


TIPO	A	B	C	D	E	F	CODICE
6 AMC 900	280	124	150	16	248	0	20801
6 AMC 1.200	280	124	150	16	248	0	20811
6 AMC 1.500	280	124	150	16	248	0	20821
6 AMC 2.100	280	124	150	16	248	0	20831
6 AMC 3.000	350	124	200	18	300	0	20841
6 AMC 4.500	350	124	200	18	300	0	20851

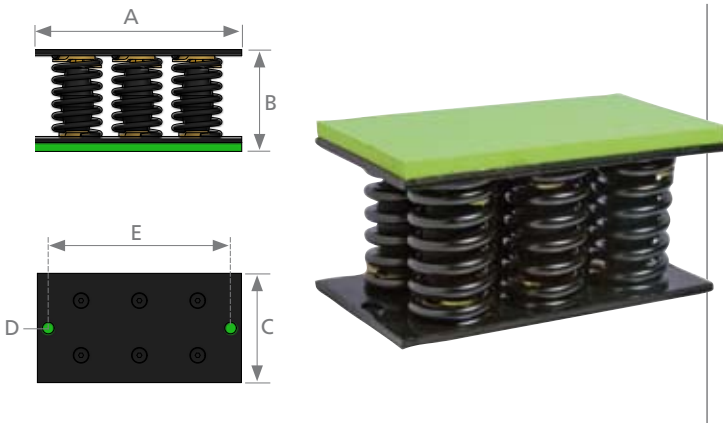

AMC FREQUENZE PROPRIE  
MECANOCAUCHO® Tipo 6 AMC

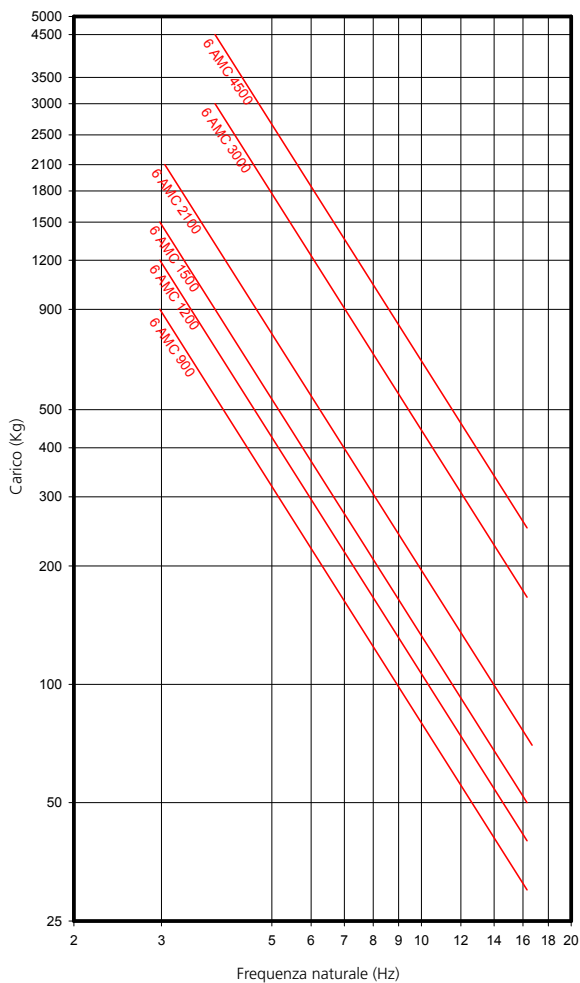

AMC CARICO DEFORMAZIONE  
MECANOCAUCHO® Tipo 6 AMC

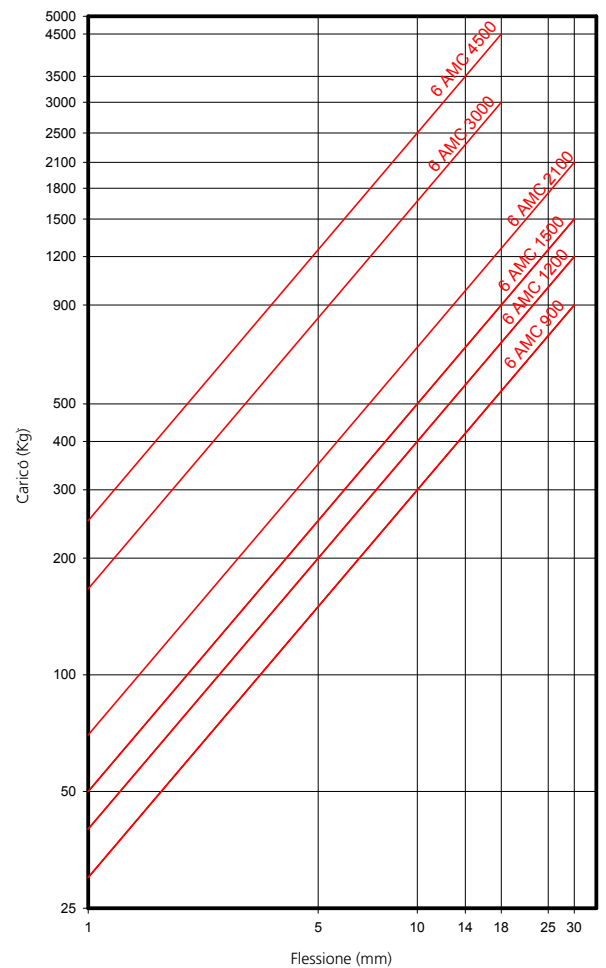

Per conoscere i vantaggi del Sylomer nei sistemi vibrabsorber®, consultare le pagine 14,15,16